


# CHILD SAFETY DEVICES



CHILD SAFE  
PRODUCT

## FITTING INSTRUCTIONS

### CORD CLEAT - VH140

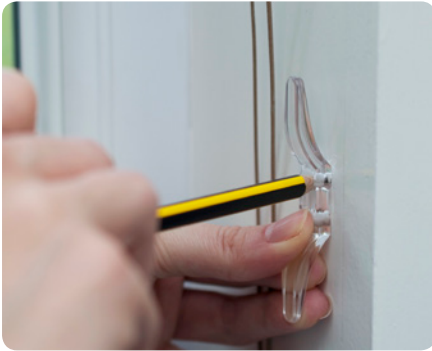

1. Position device as close to the headrail as possible and in all cases, no less than 1.5m from the floor in compliance with BS EN13120\*. Mark hole positions on substrate.
2. Drill pilot holes and screw device into position. Use applicable wall plugs if required.
3. Ensure complete length of pull cords can be accumulated and maintained when the internal blind is in the fully retracted position.

\* For a full overview of the requirements of BS EN13120, please refer to the relevant product Child Safety Guide.

All the above components are tested to ensure compliance with the Child Safety requirements of BS EN13120. Using any alternative components would not be covered by our certification and require additional testing to ensure compliance. Make sure the required labels are left on the device & blind when installation is complete.

**eclipse**

ECLIPSE BLIND SYSTEMS INCHINNAN BUSINESS PARK RENFREW PA4 9RE SCOTLAND UK  
TEL: +44 (0) 141 812 3322 FAX: +44 (0) 141 812 5253 [www.eclipseblinds.co.uk](http://www.eclipseblinds.co.uk)